


A-21-F Flat Tie

Dayton Superior A-21-F Flat Tie is used to tie steel frame form panels together. A-21-K Tie Keys are inserted through adjoining panels and the tie key slot. A-21-C Panel Clamps are required at each tie location to prevent lateral form movement. A-21-F Flat Ties are available from 6" through 24" in 1/2" increments. Standard breakback is 1/2".

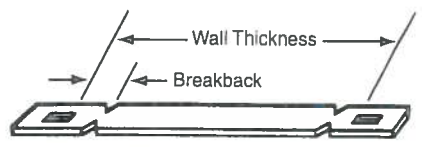

A-21-F Flat Tie

To Order:
Specify: (1) quantity, (2) name, (3) wall thickness.


Example:
1,000 pcs. A-21-F Flat Tie, 16" wall.

SWL provides a factor of safety of approximately 2 to 1.


**2,250 lbs.
Safe Working Load**

A-21-X Flat Tie

Dayton Superior A-21-X Flat Tie is used with the A-51 Wedge Bolt to secure and space modular forms. A-21-X ties are available in 6" through 24" in 1/2" increments. The wall thickness is stamped on each tie. Standard breakback is 1/4".

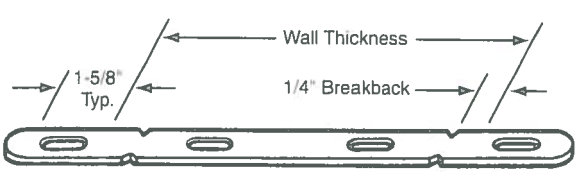

A-21-X Flat Tie

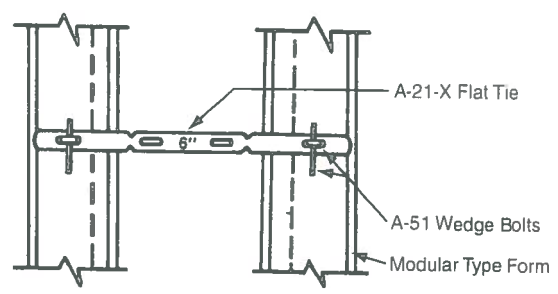

**3,000 lbs.
Safe Working Load**

To Order:
Specify: (1) quantity, (2) name, (3) wall thickness.

Example:
2,500 pcs. A-21-X Flat Tie, 12" wall.

SWL provides a factor of safety of approximately 2 to 1.

Light Forming Products